KillTest

更に上のクオリティ　更に上のサービス

問題集

Exam : **70-740**

Title : Installation, Storage, and Compute with Windows Server 2016
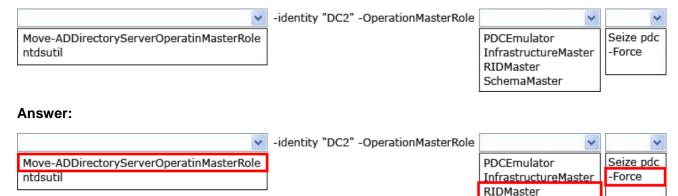
Version : Demo

1.HOTSPOT

Your network contains an Active Directory forest The forest contains two domain controllers named DC1 and DC2 that run Windows Server 2016. DC1 holds all of the operations master roles.

DC1 experiences a hardware failure

You plan to use an automated process that will create 1000 user accounts

You need to ensure that the automated process can complete successfully

Which command should you run? To answer, select the appropriate options in the answer area

	-identity "DC2" -OperationMasterRole		
Move-ADDirectoryServerOperatinMasterRole ntdsutil		PDCEmulator InfrastructureMaster RIDMaster SchemaMaster	Seize pdc -Force

Answer:

	-identity "DC2" -OperationMasterRole		
Move-ADDirectoryServerOperatinMasterRole ntdsutil		PDCEmulator InfrastructureMaster **RIDMaster** SchemaMaster	Seize pdc **-Force**

2.HOTSPOT

Your network contains an Active Directory forest The forest contains one domain named contoso.com. The domain contains two domain controllers named DC1 and DC2. DC1 holds all of the operations master roles.

During normal network operations, you run the following commands on DC2:

Move-ADDirectoryServerOperationMasterRole -Identity "DC2" -OperationMasterRole PDCEmulator

Move-ADDirectoryServerOperationMasterRole -Identity "DC2" -OperationMasterRole RIDMaster

DC1 fails.

You remove DC1 from the network, and then you run the following command:

Move-ADDirectoryServerOperationMasterRole -Identity "DC2" -OperationMasterRole SchemaMaster

For each of the following statements, select Yes if the statement is true. Otherwise, select No

Statements	Yes	No
DC2 holds the schema master operations role.	○	○
DC2 holds the PDC emulator master operations role.	○	○
Currently, you can add additional domains to the forest.	○	○

Answer:

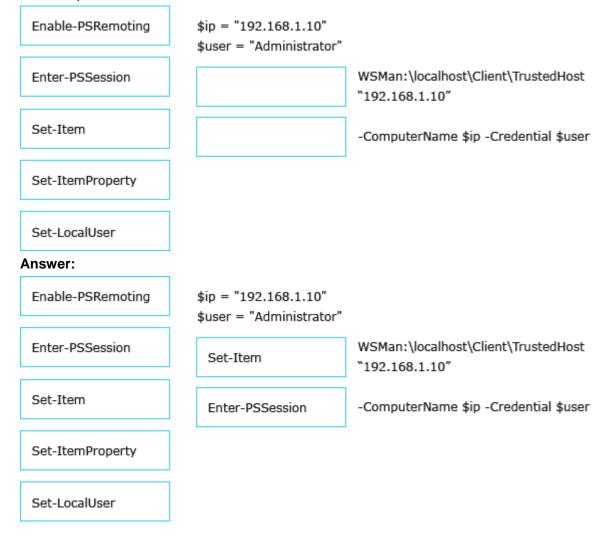| Statements	Yes	No
DC2 holds the schema master operations role.	○	**☐**
DC2 holds the PDC emulator master operations role.	**☐**	○
Currently, you can add additional domains to the forest.	○	**☐**

3.DRAG DROP

You install a new Nano Server named Nano1. Nano1 is a member of a workgroup and has an IP address of 192 1698 1.10.

You have a server named Server1 that runs Windows Server 2016.

From Server1, you need to establish a Windows PowerShell session to Nano1.

How should you complete the PowerShell script? To answer, drag the appropriate cmdlets to the correct targets Each cmdlet may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

Enable-PSRemoting	$ip = "192.168.1.10" $user = "Administrator"	
Enter-PSSession	[ ]	WSMan:\localhost\Client\TrustedHost "192.168.1.10"
Set-Item	[ ]	-ComputerName $ip -Credential $user
Set-ItemProperty		
Set-LocalUser		

Answer:

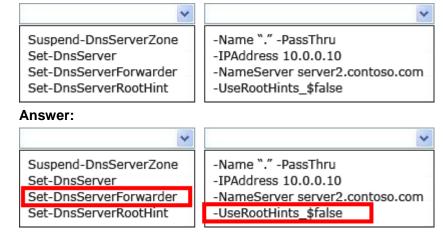| Enable-PSRemoting	$ip = "192.168.1.10" $user = "Administrator"	
Enter-PSSession	Set-Item	WSMan:\localhost\Client\TrustedHost "192.168.1.10"
Set-Item	Enter-PSSession	-ComputerName $ip -Credential $user
Set-ItemProperty		
Set-LocalUser		

4.HOTSPOT

Your network contains an Active Directory domain named contoso com. The domain contains a DNS server named Server1

Server1 configured to use a forwarder named server2.contoso.com that has an IP address of 10.0.0.10.

You need to prevent Server1 from using root hints if the forwarder is unavailable.

What command should you run? To answer, select the appropriate options in the answer area

Suspend-DnsServerZone	-Name "." -PassThru
Set-DnsServer	-IPAddress 10.0.0.10
Set-DnsServerForwarder	-NameServer server2.contoso.com
Set-DnsServerRootHint	-UseRootHints_$false

Answer:

Suspend-DnsServerZone	-Name "." -PassThru
Set-DnsServer	-IPAddress 10.0.0.10
Set-DnsServerForwarder	-NameServer server2.contoso.com
Set-DnsServerRootHint	**-UseRootHints_$false**

5.You have a Nano Server named Nano1.

Which cmdlet should you use to identify whether the DNS Server role is installed on Nano1?

A. Find-NanoServerPackage

B. Get-Package

C. Find-Package

D. Get-WindowsOptionalFeature

Answer: B