

# *KillTest*

更に上のクオリティ 更に上のサービス



## 問題集

<http://www.killtest.jp>

1年で無料進級することに提供する

**Exam** : **AI-901**

**Title** : Microsoft Azure AI  
Fundamentals (Updated  
Version)

**Version** : DEMO

1.You have a Microsoft Foundry project that contains an agent named Agent1.  
You need to ensure that Agent1 always calls an Azure function when the agent responds to user input.  
To what should you set tool\_choice for Agent1?

- A. auto
- B. none
- C. required

**Answer: C**

**Explanation:**

Microsoft’s Foundry Agent Service documentation states that tool\_choice provides deterministic control over tool calling:

- auto means the model decides whether to call tools.
- required means the model must call one or more tools.
- none means the model does not call tools.

Therefore:


- A. auto = Incorrect, because the model may or may not call the Azure function.
- B. none = Incorrect, because this prevents tool/function calls.
- C. required = Correct, because it forces the agent to call a tool.

The Azure OpenAI function-calling documentation also confirms that tool\_choice="auto" lets the model decide whether to call a function, while tool\_choice="none" forces a user-facing response without a tool call.

**2.HOTSPOT**

Select the answer that correctly completes the sentence.


When content is submitted to Azure Content Understanding in Foundry Tools,  
the analysis is

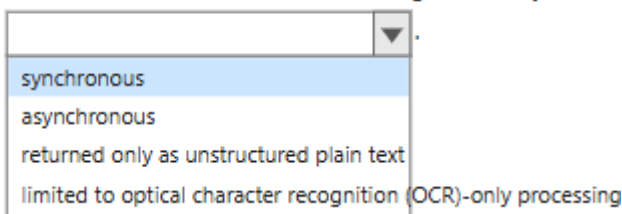

A screenshot of a dropdown menu. The menu is open, showing four options: 'synchronous', 'asynchronous', 'returned only as unstructured plain text', and 'limited to optical character recognition (OCR)-only processing'. The 'synchronous' option is currently selected and highlighted in blue.

**Answer:**

When content is submitted to Azure Content Understanding in Foundry Tools,  
the analysis is

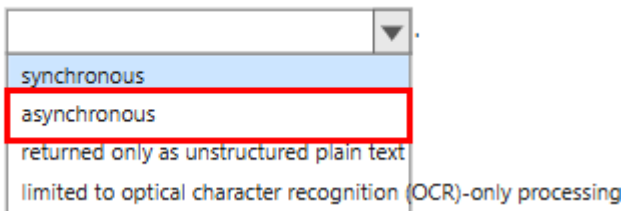

A screenshot of a dropdown menu, identical to the one above. The 'asynchronous' option is highlighted with a red rectangular box, indicating it is the correct answer.

**Explanation:**

When content is submitted to Azure Content Understanding in Foundry Tools, the analysis is asynchronous. This means the service does not return results immediately within the same HTTP request. Instead, it uses the standard Azure long-running operation (LRO) pattern — you call begin\_analyze() to submit the content, which immediately returns a poller object, and then call poller.result() to wait for processing to complete and retrieve the structured extraction results.

Why the other options are wrong:

Synchronous is incorrect — the analysis pipeline involves multiple AI steps (OCR, speech transcription,

schema mapping) that take time; a blocking synchronous call is not supported.

Returned only as unstructured plain text is incorrect — Azure Content Understanding returns richly structured JSON output with named fields mapped to your defined schema, not plain unstructured text. Limited to OCR-only processing is incorrect — Content Understanding goes far beyond OCR; it supports document, audio, image, and video analyzers, and performs semantic field extraction using AI, not just character recognition.

This asynchronous design is consistent across all Azure AI services that perform complex, multi-step content processing.

### 3.DRAG DROP

You have a Microsoft Foundry project named project1 that contains an Azure OpenAI resource named Resource1.

To Resource1, you deploy a gpt-4.1-mini model by using a model deployment named my-mini-gpt.

You need to connect to my-mini-gpt from an application.

How should you complete the Python code? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once, or not at all. NOTE: Each correct selection is worth one point.

Values	Answer Area
gpt-4.1-mini	<pre> client = OpenAI(api_key="...", base_url="https://<input type="text" value="project1"/>.openai.azure.com/openai/v1/";) response = client.responses.create( model=" <input type="text" value="my-mini-gpt"/> ", ... ) </pre>
my-mini-gpt	
project1	
resource1	

#### Answer:

Values	Answer Area
gpt-4.1-mini	<pre> client = OpenAI(api_key="...", base_url="https:// <input type="text" value="resource1"/>.openai.azure.com/openai/v1/";) response = client.responses.create( model=" <input type="text" value="my-mini-gpt"/> ", ... ) </pre>
my-mini-gpt	
project1	
resource1	

#### Explanation:

```

client = OpenAI(
api_key="...",
base_url="https://resource1.openai.azure.com/openai/v1/",
)
response = client.responses.create(
model="my-mini-gpt",
...
)

```

For Azure OpenAI in Microsoft Foundry, the base\_url uses the Azure OpenAI resource name in the endpoint format:

https://<resource-name>.openai.azure.com/openai/v1/

In the question, the Azure OpenAI resource is named Resource1, so the first blank must be resource1. Microsoft documentation for Azure OpenAI v1 endpoints confirms that the endpoint must use the ...openai.azure.com/openai/v1/ path.

For the model parameter, Azure OpenAI requires the deployment name, not the underlying model name. Microsoft states that Azure OpenAI always requires the deployment name when calling APIs, even when the parameter is named model.

The deployed model is gpt-4.1-mini, but the deployment name is my-mini-gpt. Therefore, the second blank must be:

```
model="my-mini-gpt"
```

So the correct selections are:

base\_url blank = resource1

model blank = my-mini-gpt

4. What are two purposes of instructions when prompting a generative AI model? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. defines constraints on the model's responses
- B. defines the agent's role and behavior
- C. defines the Azure region where inference occurs
- D. selects which model to use
- E. defines the tokens per minute (TPM) allocation for the model

**Answer:** A, B

**Explanation:**

Microsoft Foundry Agent Service documentation states that instructions define goals, constraints, and behavior for an agent. Therefore, instructions are used to guide how the generative AI model or agent should respond and behave.

Option A is correct because instructions can define constraints the model must follow.

Option B is correct because instructions can define the agent's role and behavior.

Options C, D, and E are incorrect because Azure region, model selection, and TPM allocation are configuration or deployment/resource settings, not purposes of prompt instructions.

5. You are developing an application that analyzes voicemail recordings by using Azure Content Understanding in Foundry Tools.

You need to extract a transcript and structured information from the recordings.

Which type of analyzer should you use?

- A. document analyzer
- B. video analyzer
- C. audio analyzer
- D. image analyzer

**Answer:** C

**Explanation:**

Voicemail recordings are audio content. Azure Content Understanding analyzers define what type of content to process, including documents, images, audio, or video, and what elements to extract, including transcripts and structured fields.

Microsoft's custom analyzer documentation also shows an audio example based on prebuilt-audio for

processing customer support call recordings, which is the same content type as voicemail recordings. Therefore, to extract a transcript and structured information from voicemail recordings, you should use an audio analyzer.